

Midnight Sun Drilling Inc.
 #413-108 Elliot Street, Whitehorse, Y.T.
 867.633.2626 www.midnightsundrilling.com



Rig 2 - MARL M4CT
Rubber Tracks
Geotechnical/Environmental

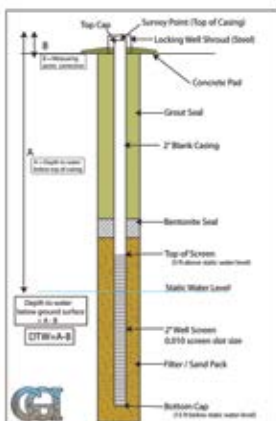


Figure 1. Ground water monitoring well completion schematic (modified from NWED Groundwater Discharge Permit Monitoring Well Construction and Abandonment Guidelines, 07/06)

SPECIFICATIONS

- Geotechnical, Environmental, Air Rotary.*
- Solid Stem (6") and Hollow Stem (4 1/4" ID)*
- S.I Casing, Piezometer and Thermistor Installations*
- Automatic SPT hammer, CPT, DCPT, 2" & 3" spoons, Shelby Tubes*
- CRREL Permafrost Coring (Cold Regions Research Engineering Laboratory)*
- 4,000 foot pounds of Torque, 8 feet of head travel*
- Mounted on a Rubber Track undercarriage*
- Weighs 8500 lbs (3800 kgs) 3.7 PSI Ground pressure*

info@midnightsundrilling.com

Rig 2 - 2011 MARL M4CT